



OUTDOOR TILES

PROFESSIONAL

CERAMICS

FULL BODY PORCELAIN RUSTIC
TILES MANUFACTURER

FOSHAN HANSE INDUSTRIAL CO., LTD

E-mail: sale@hanseceramictile.com

Tel: 0086-757-82725860 Fax: 0086-757-82264948

Office Add: No.5 Jihua 3rd Road Chancheng Foshan Guangdong China

Factory Add: Xinjing development zone, Xiaotang town, Foshan, Guangdong, China


Excellent Craft

Good Quality • Good Service • Good Price



We focus,therefore we are professional

18MM

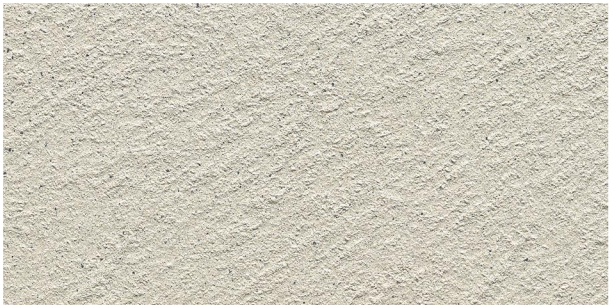

HC3011
600x300x18mm 24"x12"




HC3012
600x300x18mm 24"x12"




HC3014
600x300x18mm 24"x12"



HC3013
600x300x18mm 24"x12"

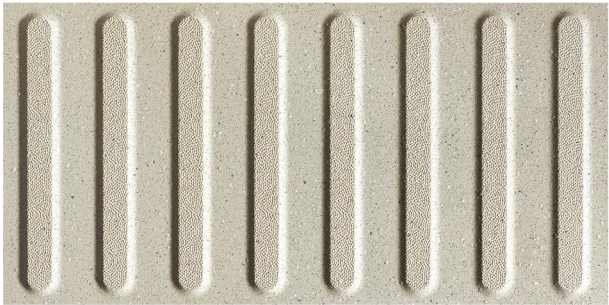

HC3011A
600x300x18mm 24"x12"

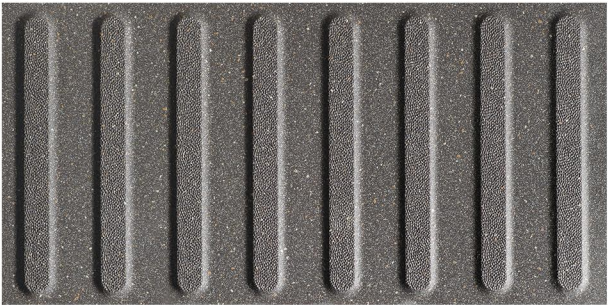


HC3012A
600x300x18mm 24"x12"



HC3014A
600x300x18mm 24"x12"



HC3011B
600x300x18mm 24"x12"

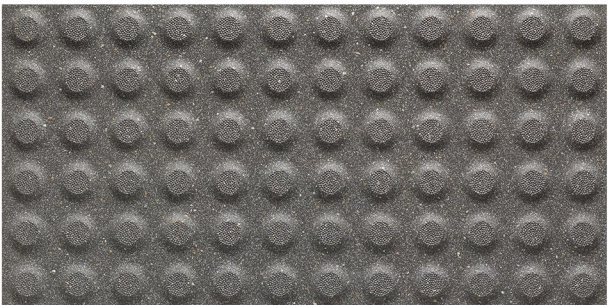

HC3012B
600x300x18mm 24"x12"



HC3014B
600x300x18mm 24"x12"

18MM

▼	Thickness
▲	20mm



HC6011
600x600x18mm 24"x24"



HC6012
600x600x18mm 24"x24"




HC6013
600x600x18mm 24"x24"



HC6014
600x600x18mm 24"x24"

Available Size

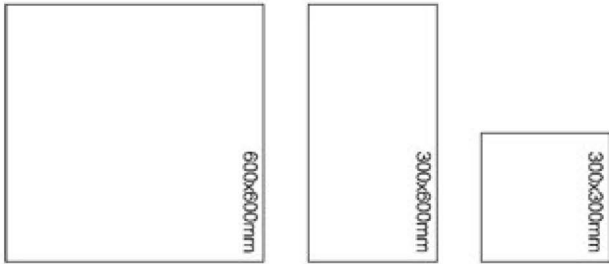



For Projects

▼

▲

Thickness
20mm



HC3001
600x300x20mm 24"x12"




HC3002
600x300x20mm 24"x12"



HC3003
600x300x20mm 24"x12"

Available Size

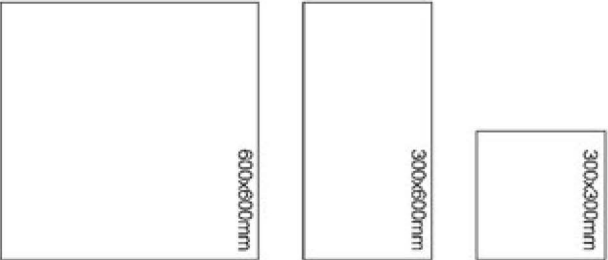


SpainSandstone



Thickness
20mm




HC3004
600x300x20mm 24"x12"

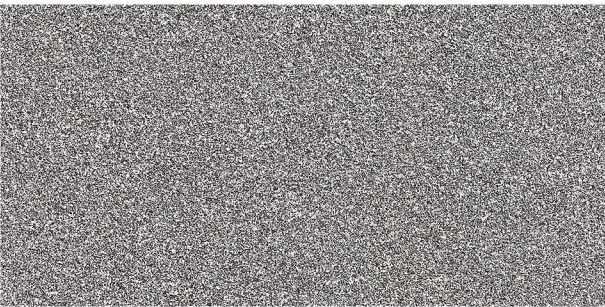

HC3007
600x300x20mm 24"x12"



HC3005
600x300x20mm 24"x12"

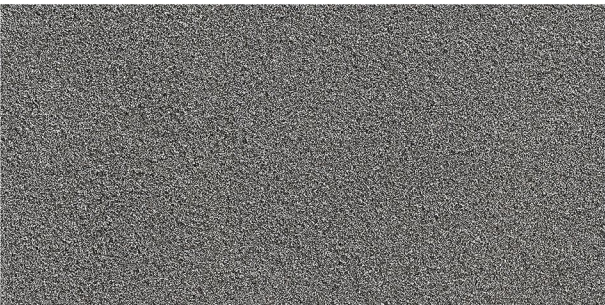

HC3008
600x300x20mm 24"x12"



HC3006
600x300x20mm 24"x12"



HC3009
600x300x20mm 24"x12"



Airport



Villa



Swimming Pool



Subway Station



Parking Lot



Square



For Projects

Thickness
20mm



2G688
600×600×20mm 24"×24"




2G684
600×600×20mm 24"×24" Matt Finish



2G684C
600×600×20mm 24"×24" Anti-Slipping Finish

Available Size

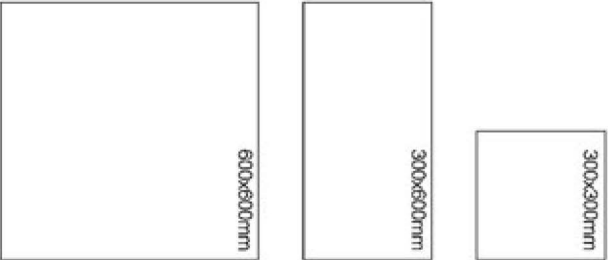

▼	Thickness
▲	20mm



2K6NS105W
600×600×20mm 24"×24"

Rough Finish



2K6NS107W
600×600×20mm 24"×24"

Rough Finish



2K6NS107W
600x600x20mm



2K6NS105W
600x600x20mm

Thickness
20mm



2K6NS101WC
600×600×20mm 24"×24"
Anti-Slipping Finish R12



2K6NS102WC
600×600×20mm 24"×24"
Anti-Slipping Finish R12



2K6NS105WC
600×600×20mm 24"×24"
Anti-Slipping Finish R12




2K6NS107WC
600×600×20mm 24"×24"
Anti-Slipping Finish R12



2K6NS103WC
600×600×20mm 24"×24"
Anti-Slipping Finish R12


Available Size

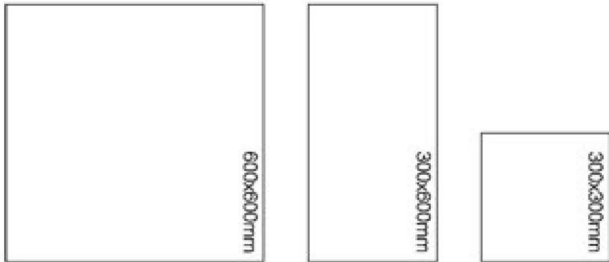

SpainSandstone



Thickness
20mm

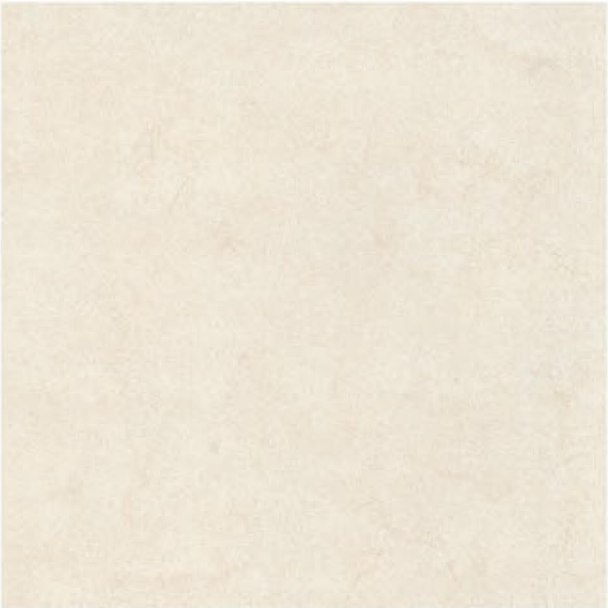

2HTS6601
600×600×20mm 24"×24"

Matt Finish
R9



2HTS6602
600×600×20mm 24"×24"


Matt Finish
R9



2HTS6603
600×600×20mm 24"×24"

Matt Finish
R9

Available Size

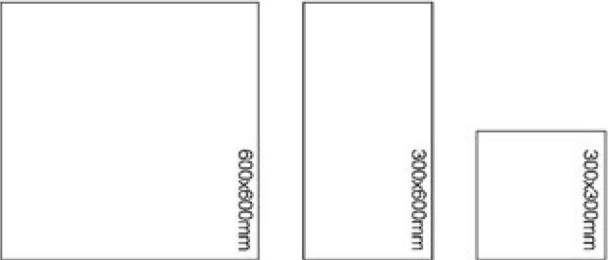

Spain Sandstone Technology
①Silk Screen Printing ②Rectified

▼

▲


Thickness
20mm






▾ 2HTS6605
600×600×20mm 24"×24"

Matt Finish
R9

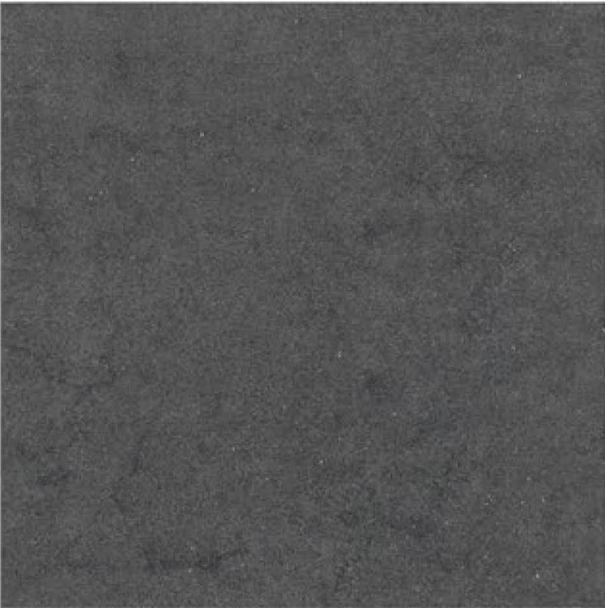

▾ 2HTS6607
600×600×20mm 24"×24"

Matt Finish
R9

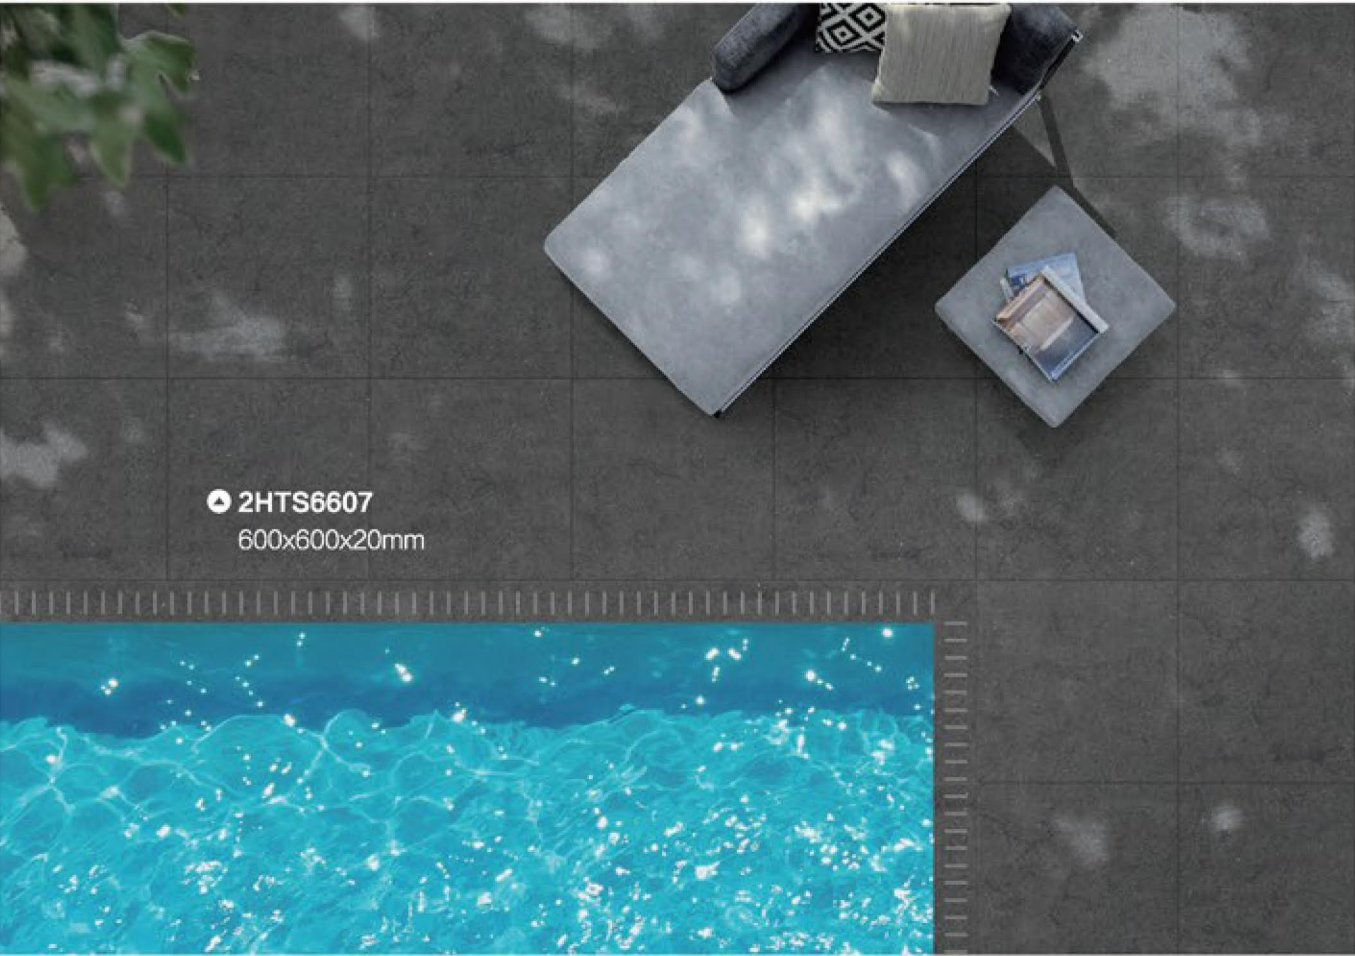

Spain Sandstone

Technology
①Silk Screen Printing ②Rectified

▼

▲

Thickness
20mm





2HTS6601C

600×600×20mm 24"×24"

Anti-Slipping Finish
R11



2HTS6602C

600×600×20mm 24"×24"


Anti-Slipping Finish
R11



2HTS6605C

600×600×20mm 24"×24"

Anti-Slipping Finish
R11

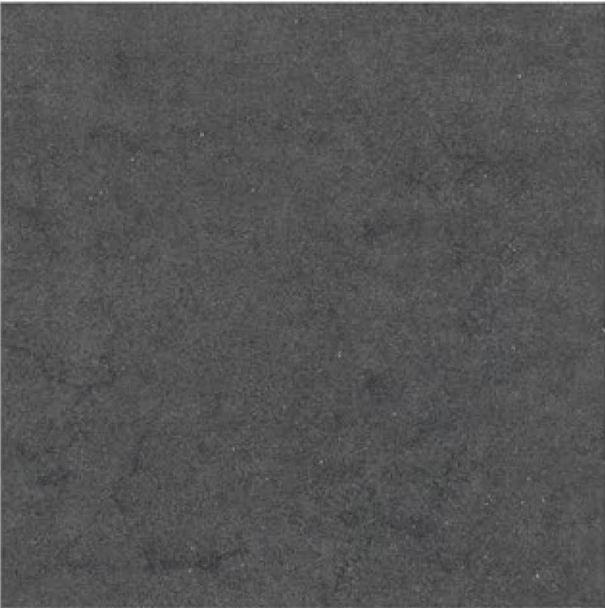

2HTS6607C

600×600×20mm 24"×24"

Anti-Slipping Finish
R11




2HTS6603C

600×600×20mm 24"×24"

Anti-Slipping Finish
R11


Available Size

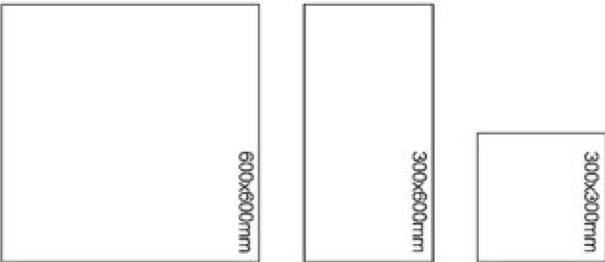

2HTS6605C

600x600x20mm

Accessories

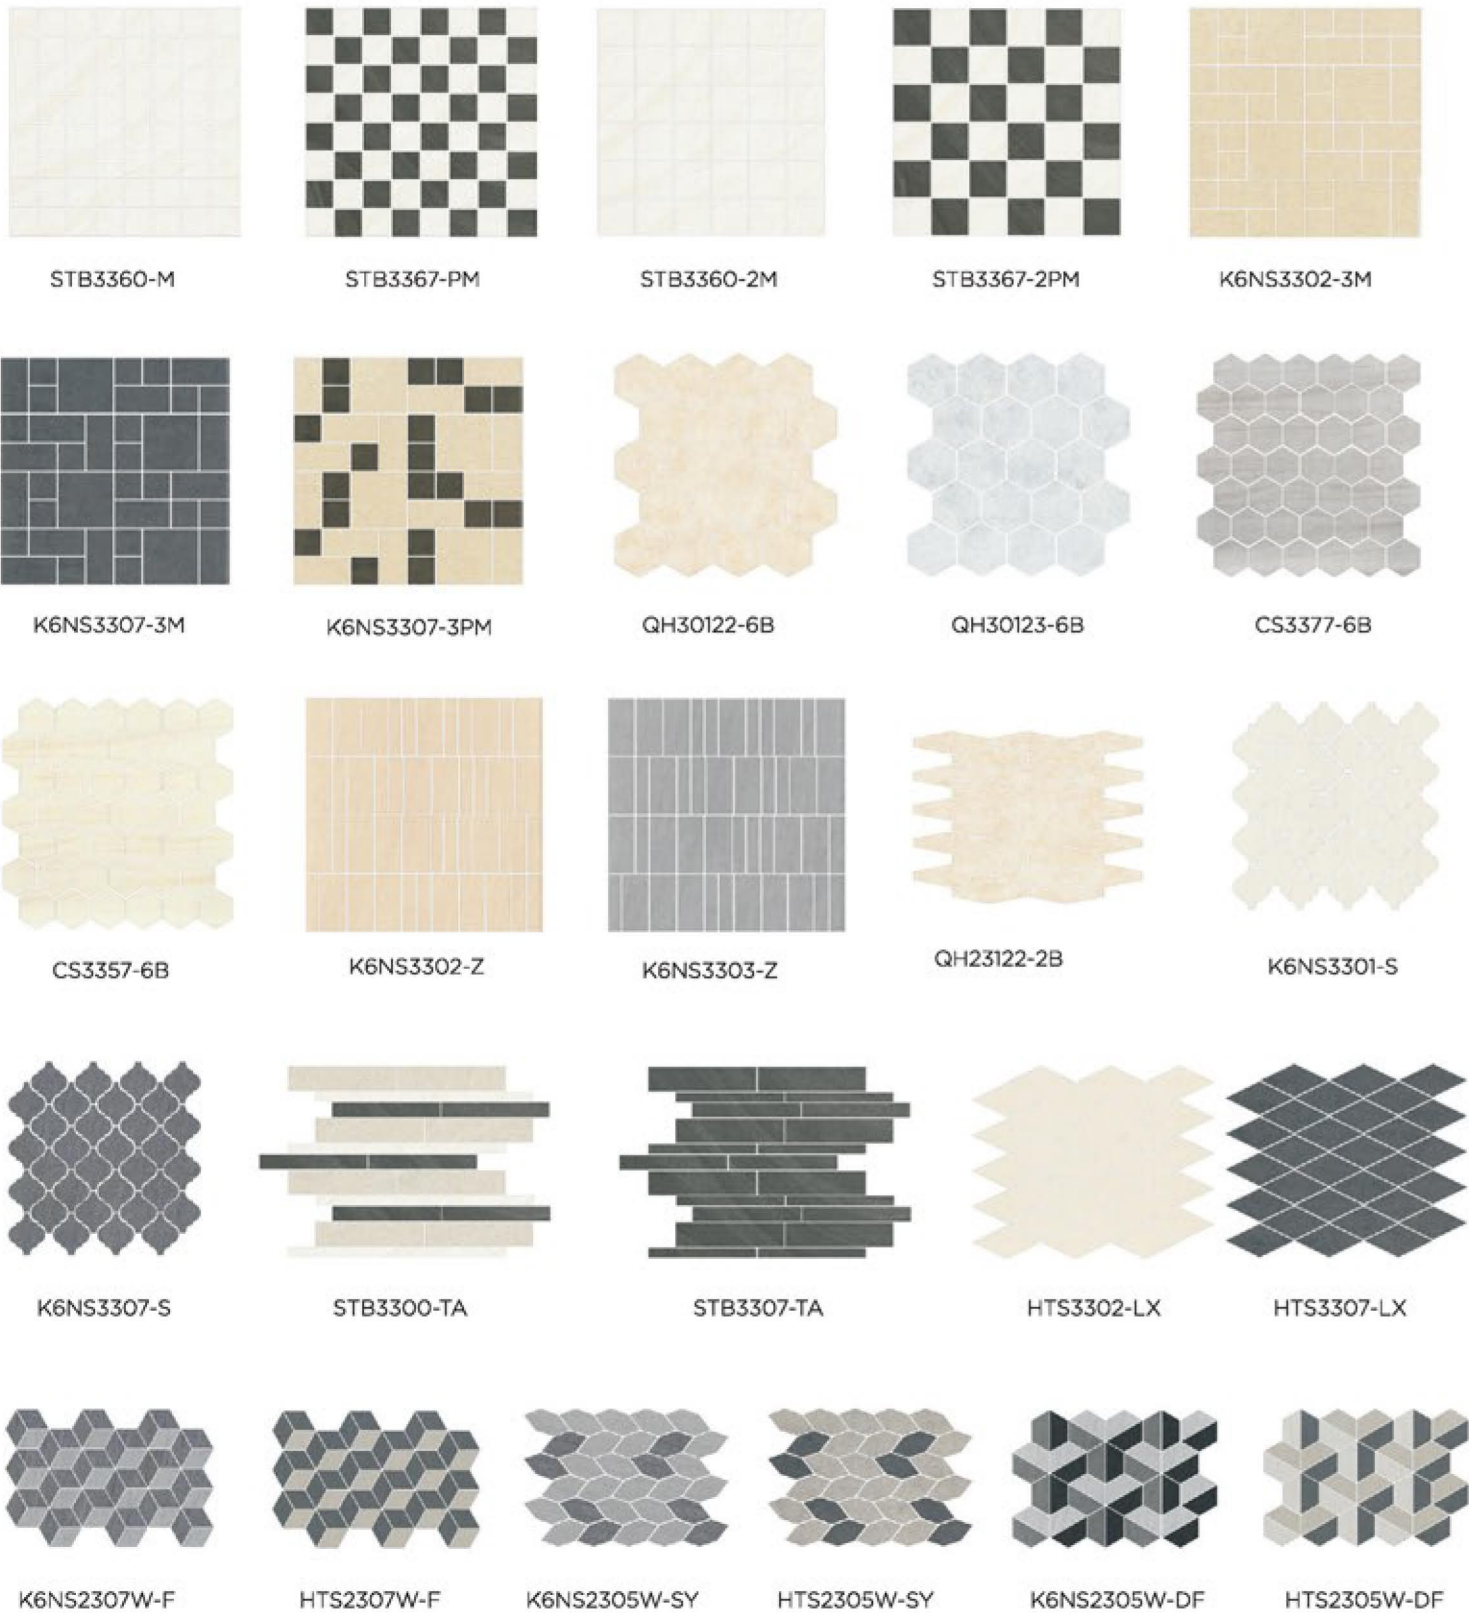

CERAMICS TECHNICAL SPECIFICATIONS

No.	Items	Test Method	Requirements		Results	Verdicts
序号	项目	检测方法	要求		检验结果	判定
1)	Length and Width 长度和宽度尺寸偏差	ISO10545-2	N≥15cm	±0.6%/ ±2.0mm	-0.02%~0/ -0.1mm~0	P
2)	Thickness 厚度	-	Declared thickness 声明厚度		9.8mm	P
3)	Straightness of sides 边直度	ISO10545-2	N≥15cm	±0.5%/ ±1.5mm	-0.02%~+0.02% / -0.1mm~+0.1mm	P
4)	Rectangularity 直角度	ISO10545-2	N≥15cm	±0.5%/ ±2.0mm	-0.06%~-0.04%% / -0.4mm~-0.2mm	P
5)	Diagonal centre curvature 对角线中心弯曲度	ISO10545-2	N≥15cm	±0.5%/ ±2.0mm	-0.01%~0 / -0.1mm~0	P
6)	Edge curvature 边弯曲度	ISO10545-2	N≥15cm	±0.5%/ ±2.0mm	-0.1%~-0.02% / -0.6mm~-0.1mm	P
7)	Diagonal warpage 对角线翘曲度	ISO10545-2	N≥15cm	±0.5%/ ±2.0mm	-0.06%~-0.04% / -0.5mm~-0.4mm	P
8)	Water Absorption 吸水率	ISO10545-3	Eb≤0.5%, Individual max (单个值不大于) 0.6%		0.1% (Individual单个值0.08%~0.11%)	P
9)	Breaking Strength 破坏强度	ISO10545-4	≥1300		2347	P
10)	Modulus of Rupture 断裂模数	ISO10545-4	Min平均值≥35, Individual 单个值≥32		Min≥45.5. Individual≥44.3~48.2	P
11)	Abrasion Resistance 耐磨性	ISO10545-7	Report abrasion class 报告耐磨级别 Report cycles passed 报告耐磨转数		Class 3 (3级) / 750	P
12)	Thermal shock resistance 抗热震性	ISO10545-9	Test method available 报告检验结果		Fully Resistance 样品经试验, 无炸残裂或裂纹	P
13)	CrazingResistance 抗釉裂性: 有釉砖	ISO10545-11	Required 要求通过		Fully Resistance 样品经试验, 无炸残裂或裂纹	P
14)	Frost Resistance 抗冻性	ISO10545-12	Required 要求通过		Fully Resistance 样品经试验, 无炸残裂或裂纹	P
15)	Slip Resistance(Ramp Test) 防滑性能 (倾斜平台法)	DIN51130			Mean overall acetance angle (平均临界角): 9.3° Slip Resistance(防滑类别): R9	-
16)	Dynamic coefficient of Friction 动摩擦系数	ANSI A 137.1-2012			Wet DCOF Value(μD) 湿法平均值 :0.51	-

PACKING					
SIZE(mm)	THICKNESS(mm)	PCS/CTN	KGS/CTN	CTN/PLLT	KGS/PLLT
600x600	10	4	32.5	40	1300
300X600	9	8	31.5	40	1260
400X800	11	5	42	40	1680
600X600	20	2	33	40	1320