

GLAZED
POLISHED

HANSE

FOSHAN HANSE INDUSTRIAL CO.,LTD

E-MAIL: sale@hanseceramictile.com
TEL: 0086-757-82725860 FAX: 0086-757-82264948

Office Add: 18 liuyuan Road,Shiwan Town,
Foshan City,Guangdong Province,China
Factory Add: Xinjing development zone,Xiaotang town,
Foshan City,Guangdong Province,China







Wall	HW126634	▲ 600X1200MM
Floor	HW6436	▲ 600X600MM

NATURE STONE DESIGN

FULL POLISHED GLAZED

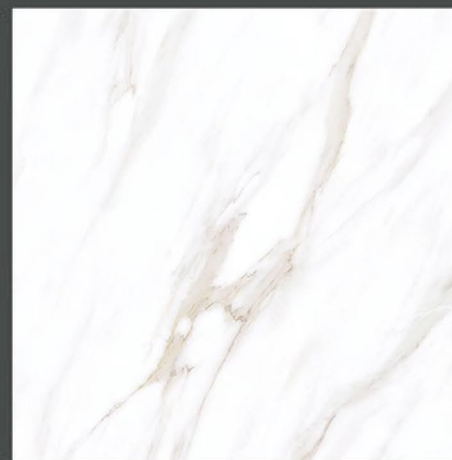

HW6602
600X600MM

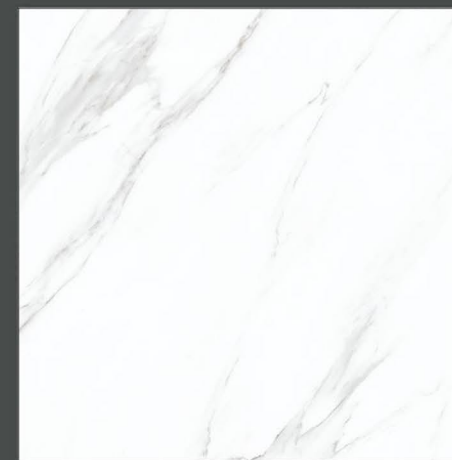


HW6603
600X600MM




HW6611
600X600MM 800X800MM




HYH6039PA
600X600MM

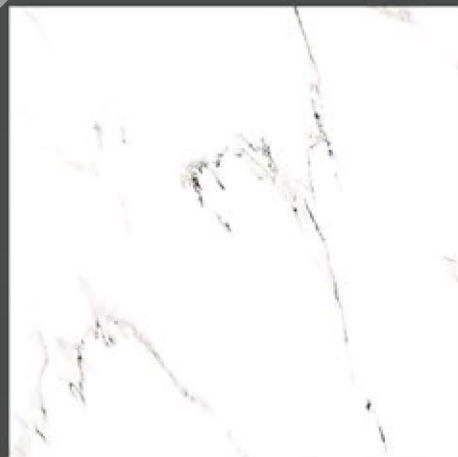


HS620GN
600X600MM

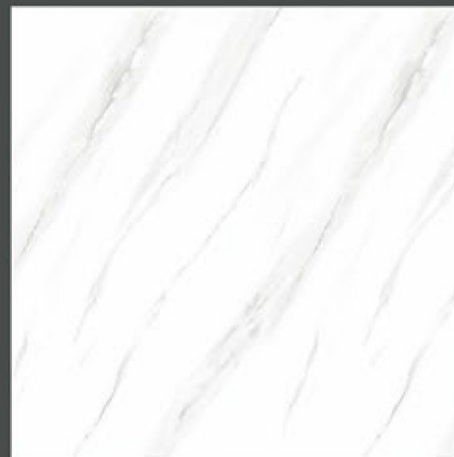


HYH6019PA HYH8019PA
600X600MM 800X800MM

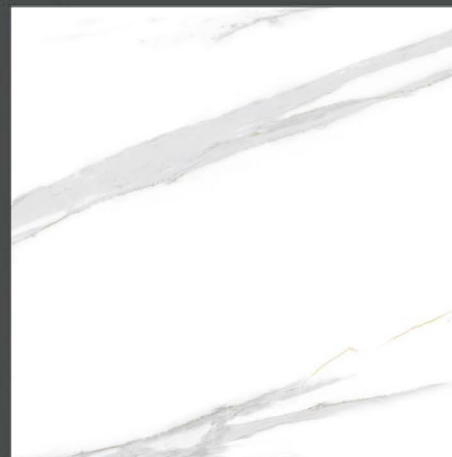


HW6612
600X600MM

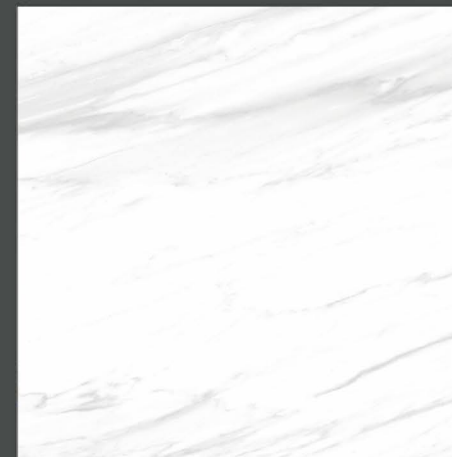

HW6613
600X600MM

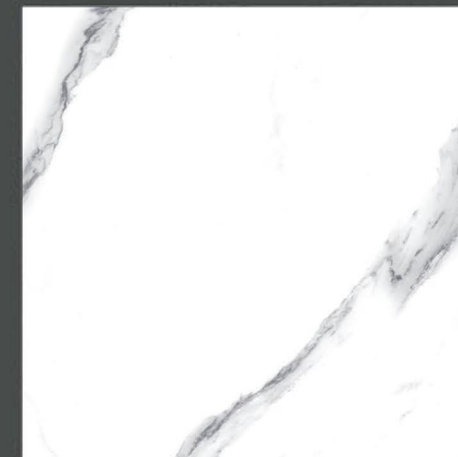


HW6631
600X600MM 800X800MM

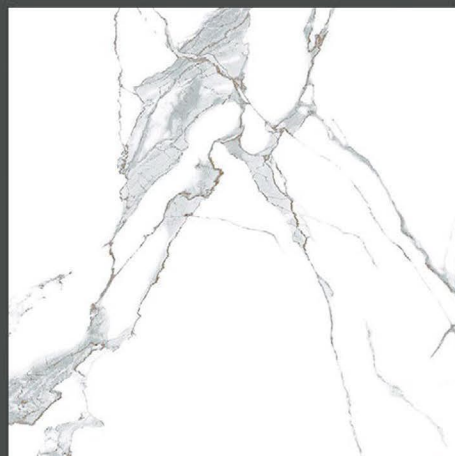

HW6601
600X600MM




HYH6104PA
600X600MM

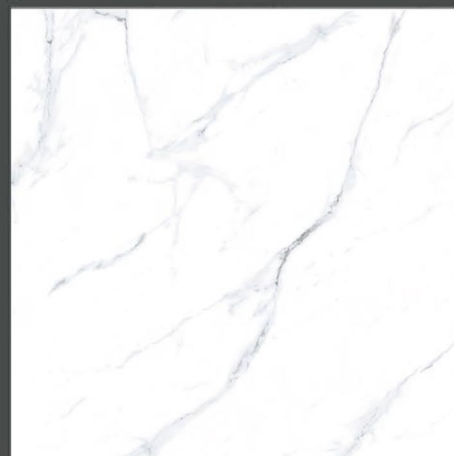


HW6632
600X600MM




HYH6260PA
600X600MM

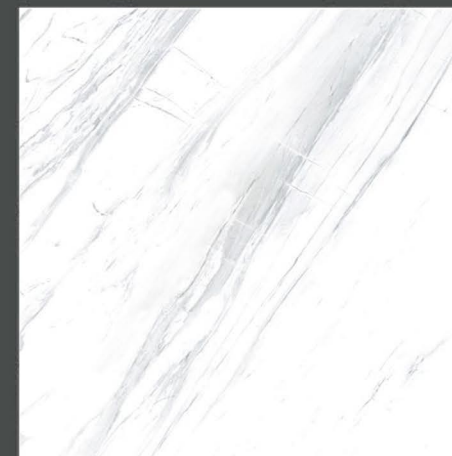


HW6633
600X600MM

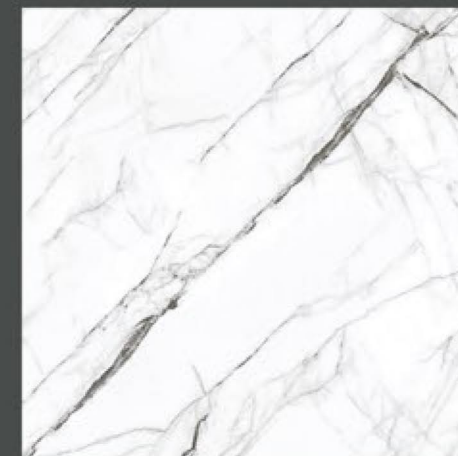

HYH6246PA
600X600MM

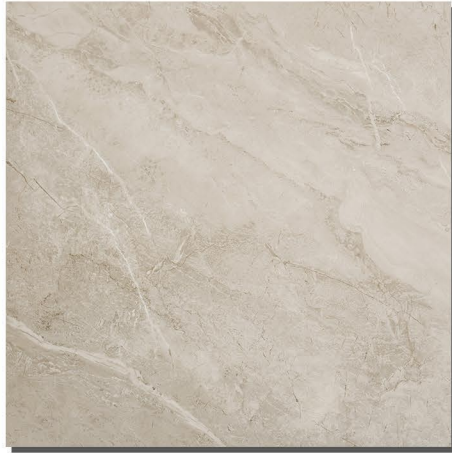

HQB6201
600x600MM

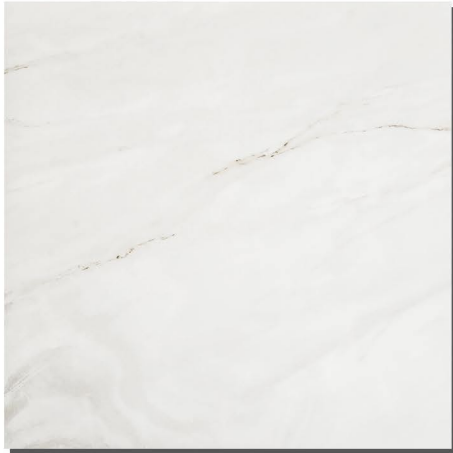

HQB6801
600x600MM



HQB6802
600x600MM



HQB6805
600x600MM



HQB6806
600X600MM



HQB6809
600X600MM




HQB6810
600X600MM



HQB6811
600X600MM



HQB6812
600X600MM

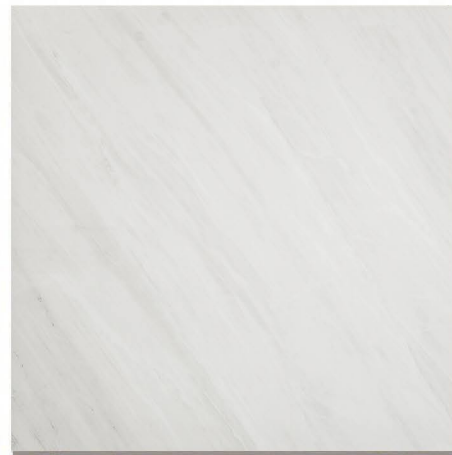

HQB6813
600X600MM



HQB6815
600X600MM



HQB6816
600X600MM



HQB6817
600X600MM



HW6720




HW6765
600X600MM




HW6763
600X600MM



HYH6113PA
600X600MM

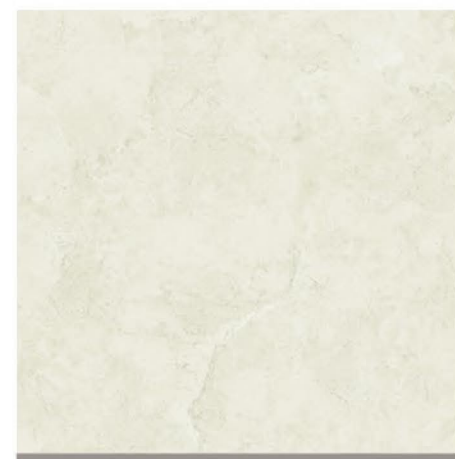


HYH6114PA
600X600MM

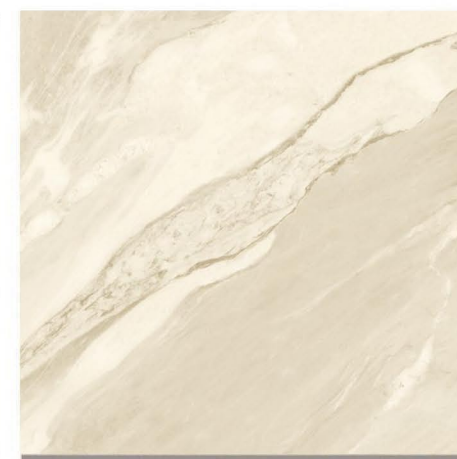

HW6433
600X600MM




HW6793
600X600MM

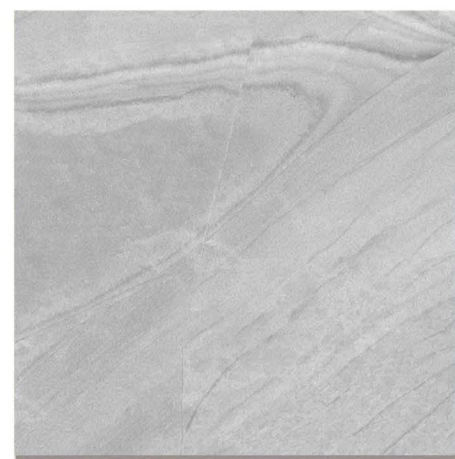

HW6746
600X600MM



HYH6138PA
600X600MM

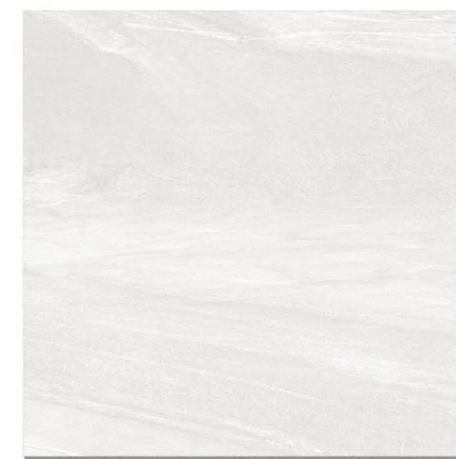


HW6720
600X600MM



HW6715




HRL8905
800X800MM

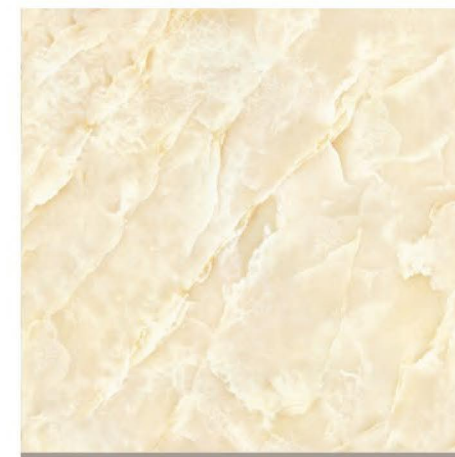


HRL8903
800X800MM



HRL8872
800X800MM

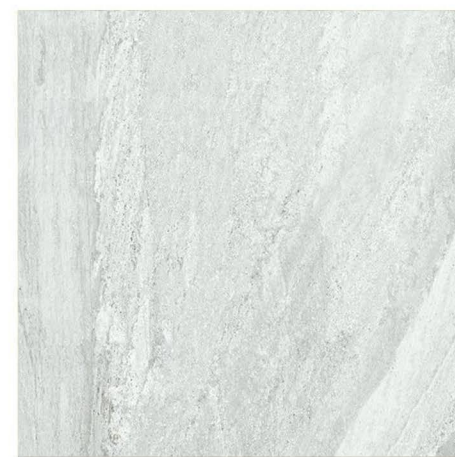

HW6715
600X600MM

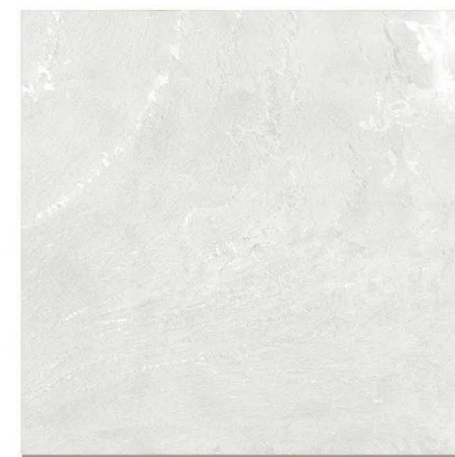

HW6730
600X600MM




HW6733
600X600MM




HW6723
600X600MM




HS624GN
600X600MM

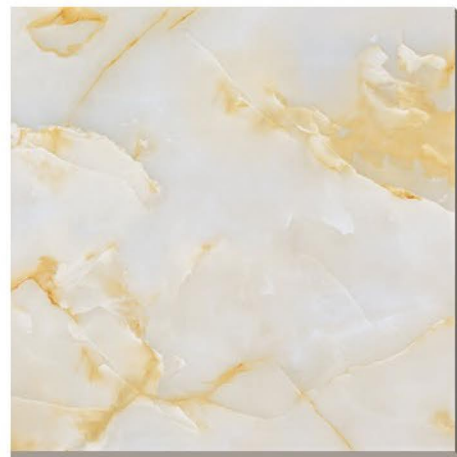

HS676GN
600X600MM

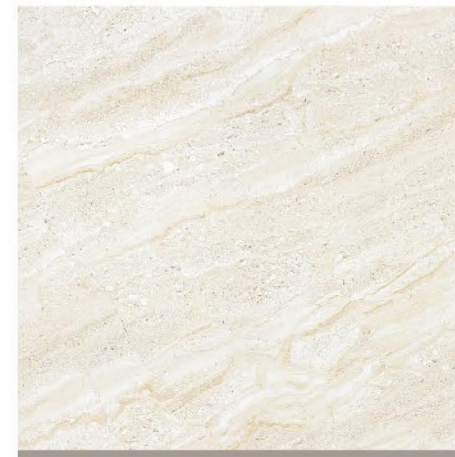

HS672GN HS872GN
600X600MM 800X800MM

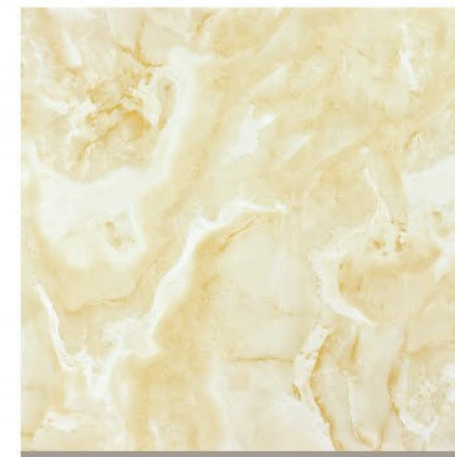


HS609GN HS809GN
600X600MM 800X800MM




HS607GN HS807GN
600X600MM 800X800MM




HW6710
600X600MM

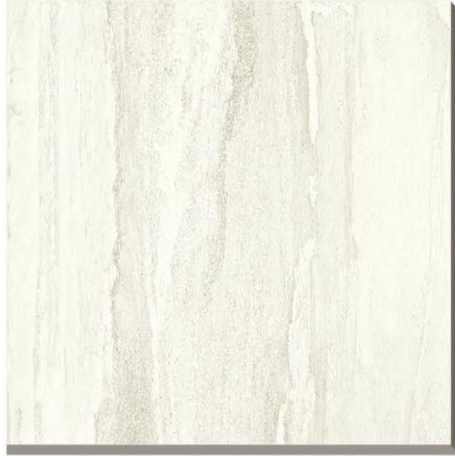


HW6712
600X600MM

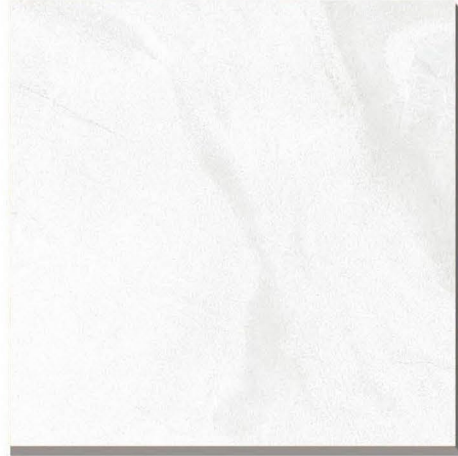

HW6740
600X600MM

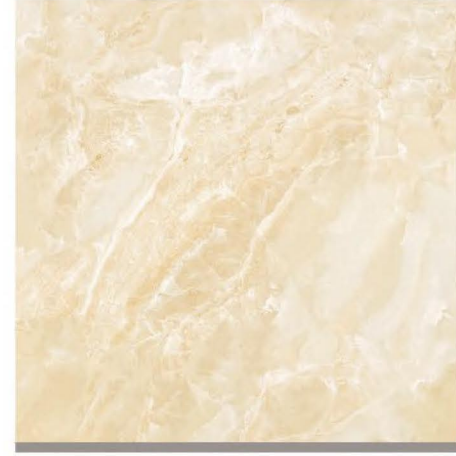

HS634GN
600X600MM

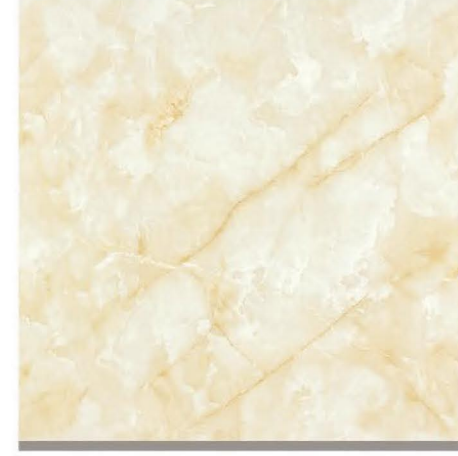

HS658GN HS858GN
600X600MM 800X800MM




HS623GN HS823GN
600X600MM 800X800MM




HS627GN HS827GN
600X600MM 800X800MM



HS625GN HS825GN
600X600MM 800X800MM

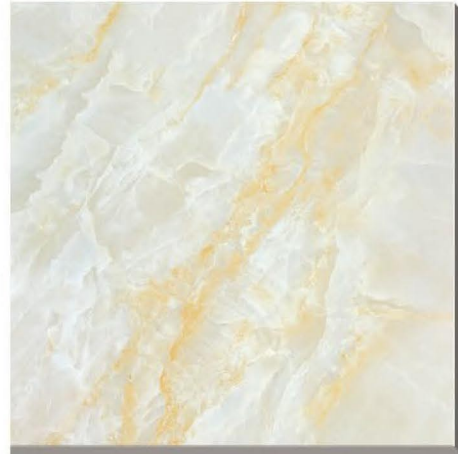


HS603GN HS803GN
600X600MM 800X800MM

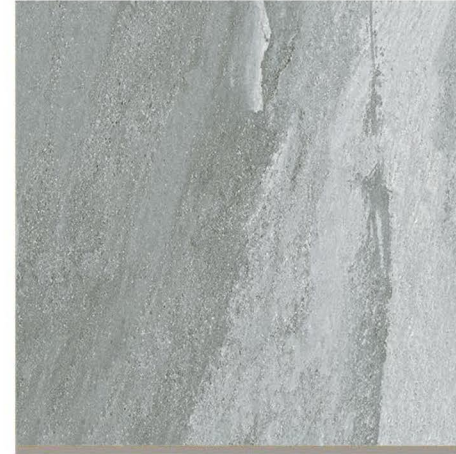


HW6716
600X600MM



HS633GN
600X600MM

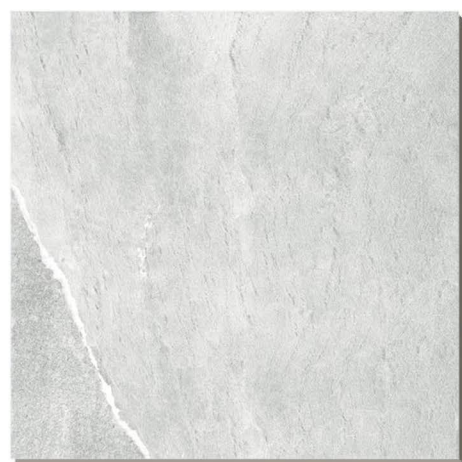

HW6735
600X600MM

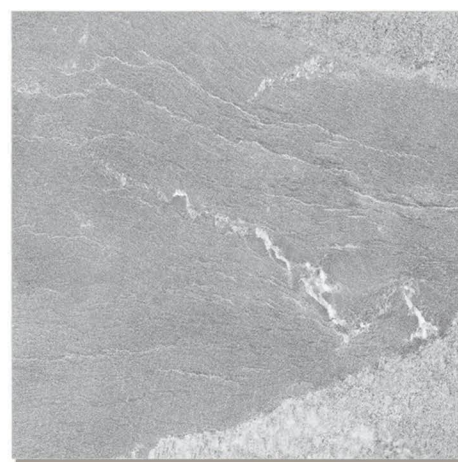

HW6736
600X600MM




HW6725
600X600MM



HW6726
600X600MM



HS659GN
600X600MM

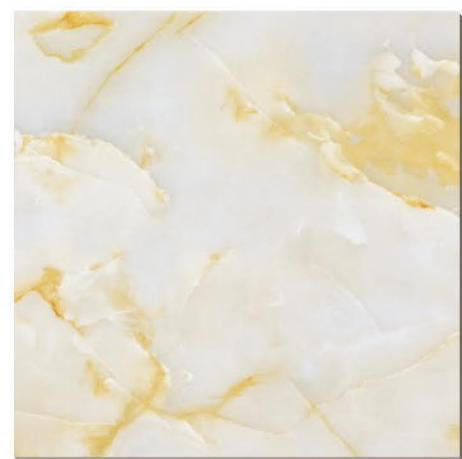


HS876GN
800X800MM



HRL8868
800X800MM




HRL8803
800X800MM

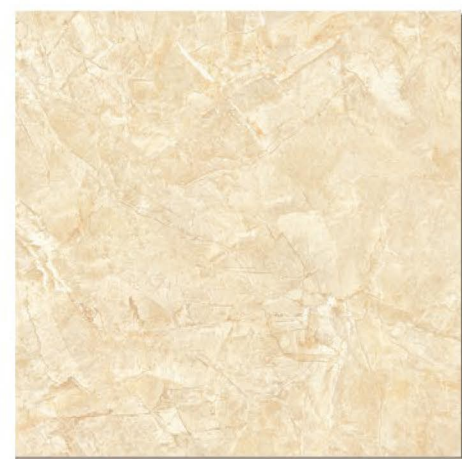


HRL8886
800X800MM



6775

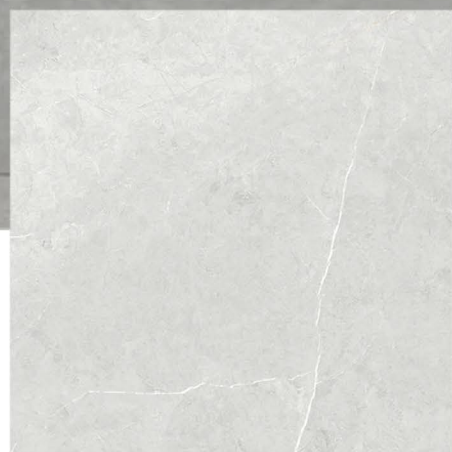


HW6770
600X600mm

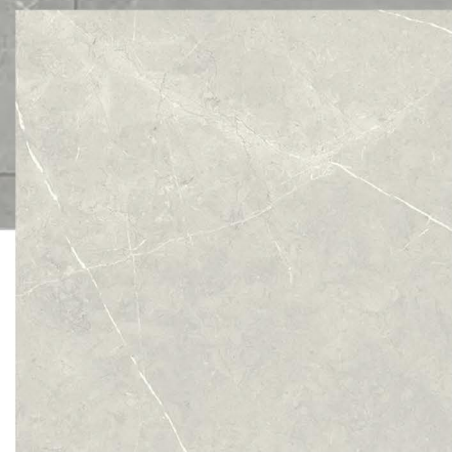

HW6773
600X600mm



HW6775
600X600mm

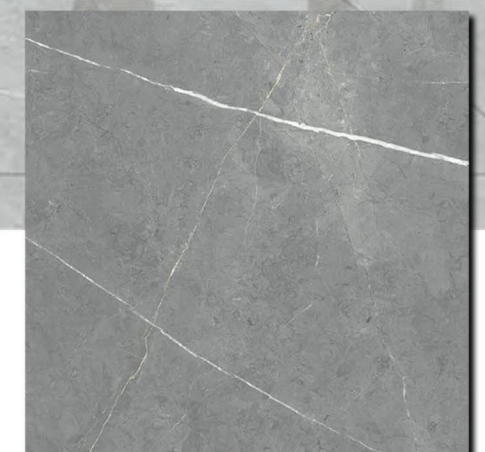

HW6776
600X600mm




HYH6077PA
600X600MM



HW6780
600X600MM



HW6785
600X600MM

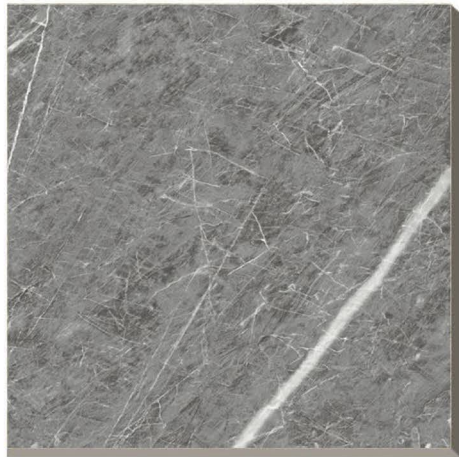


HW6786
600X600MM



HW6787
600X600MM




HW6794
600X600MM

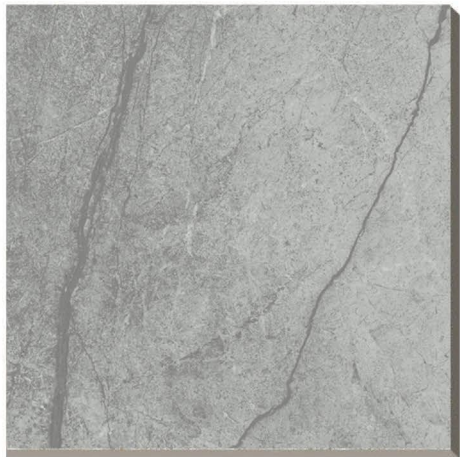

HW6795
600X600MM



HS701GN
600X600MM

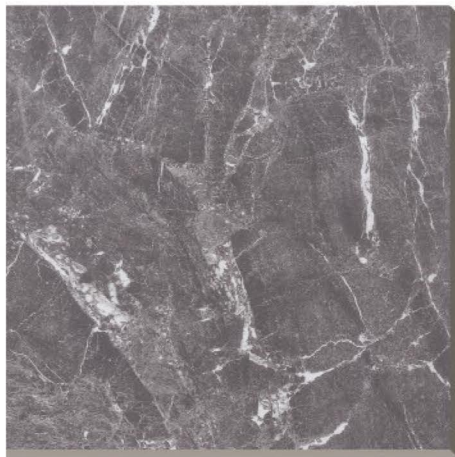

HS649GN
600X600MM




HS612GN
600X600MM



HW6796
600X600MM



HS604GN
600X600MM

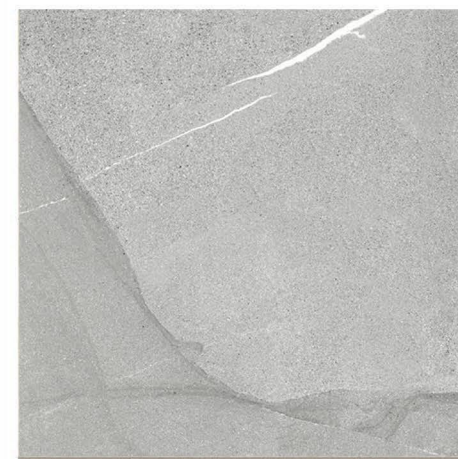


HW6445
600X600MM




HRL6655 HRL8855
600X600MM 800X800MM



HW6444
600X600MM

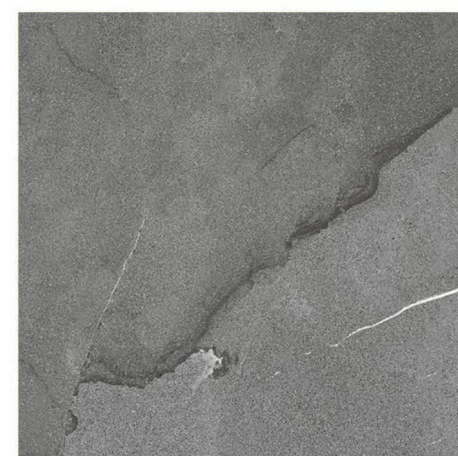

HW6446
600X600MM

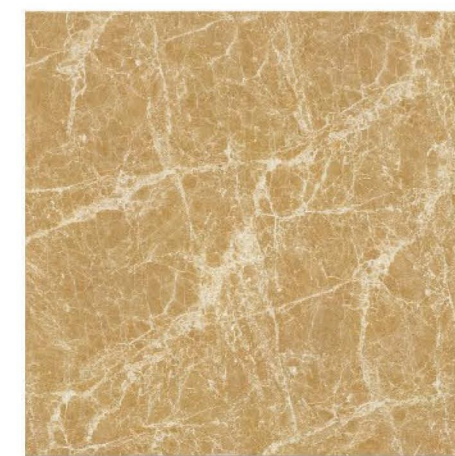

HS621GN
600X600MM



HS632GN
600X600MM




HRL8875
800X800MM



HRL8852
800X800MM




HRL8881
800X800MM

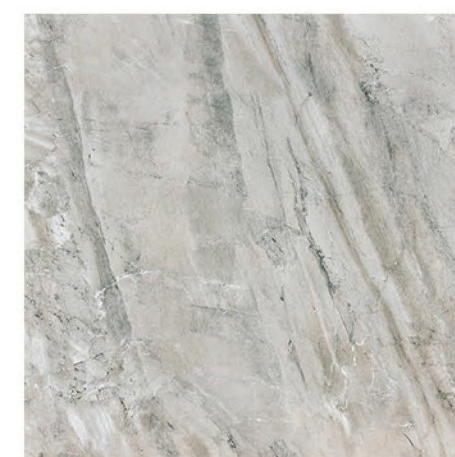


HRL8883
800X800MM




HRL8882
800X800MM

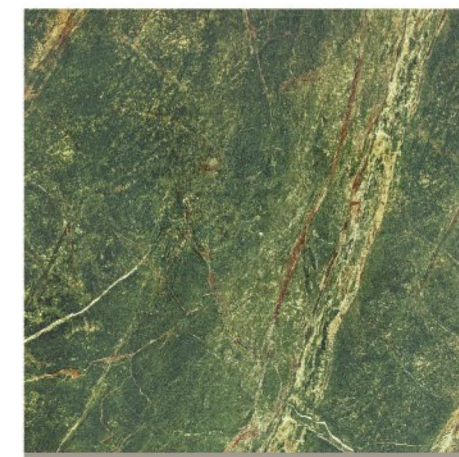

HS616GN
600X600MM

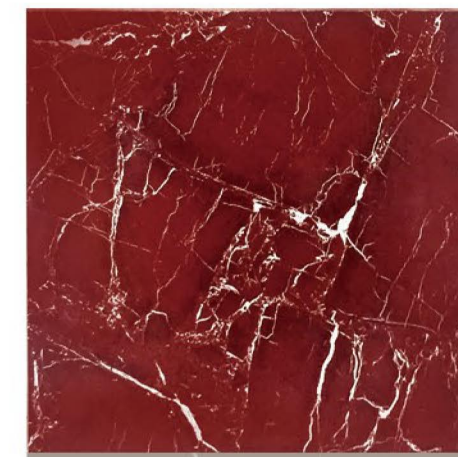

HS650GN
600X600MM

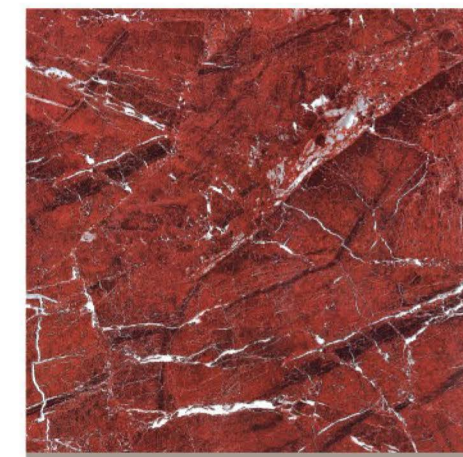


HS617GN HS817GN
600X600MM 800X800MM



HS642GN
600X600MM



HS618GN HS818GN
600X600MM 800X800MM

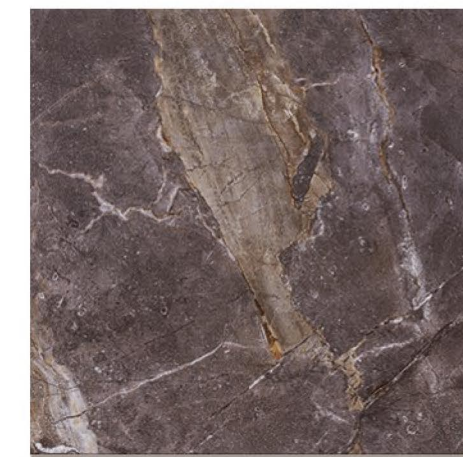

HS668GN
600X600MM




HYH6061PA
600X600MM



HYH6070PA
600X600MM




HW6766
600X600MM

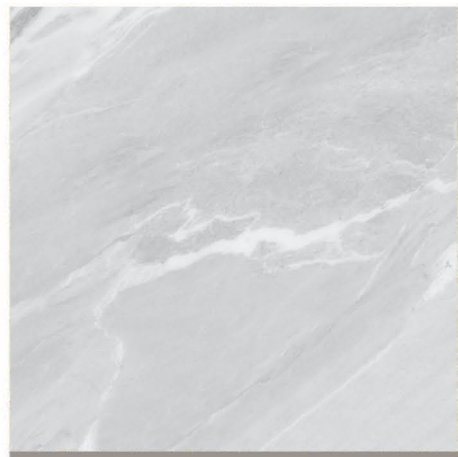

HW6435
600X600MM



HW6436
600X600MM

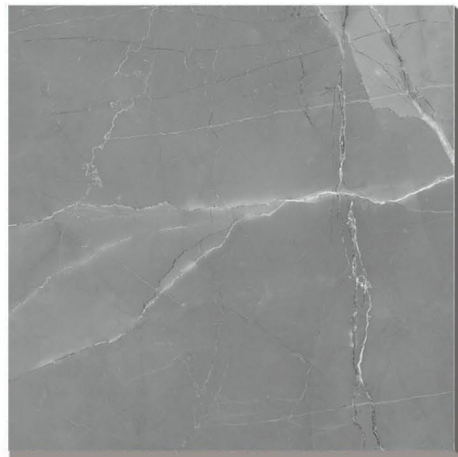

HW6767
600X600MM



HYH6057PA
600X600MM



HYH6055PA
600X600MM




HYH6060PA
600X600MM



HW6760
600X600MM



HS700GN
600X600MM

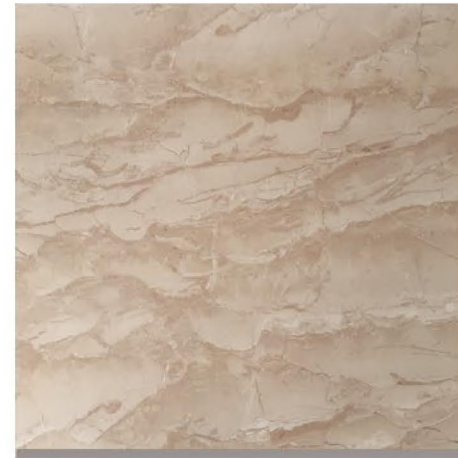

HS679GN
600X600MM



HRL8A898
800X800MM



HRL8886
800X800MM




HRL8885
800X800MM




HRL8902
800X800MM




HW6742
600X600MM

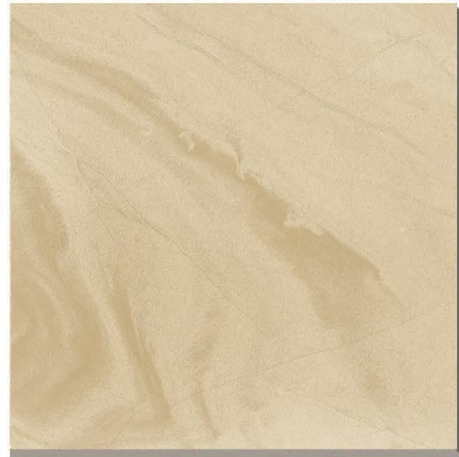

HW6744
600X600MM

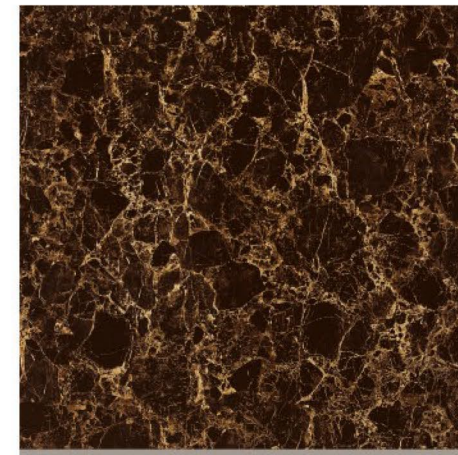

HS630GN HS830GN
600X600MM 800X800MM

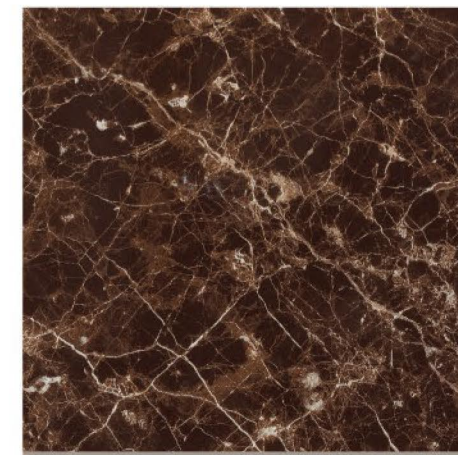


HS622GN HS822GN
600X600MM 800X800MM



HYH672GN HYH872GN
600X600MM 800X800MM



HYH6112PA
600X600MM

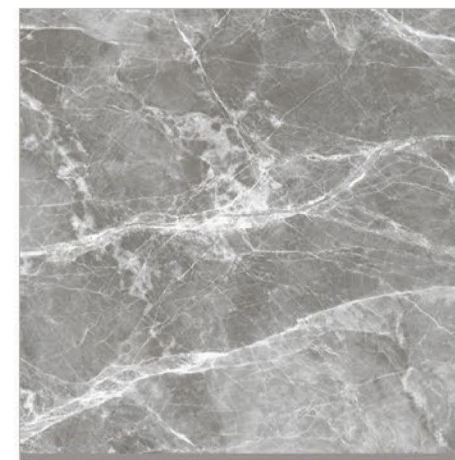

HYH6080PA
600X600MM




HYH6204PB
600X600MM




HS619GN HS819GN
600X600MM 800X800MM



HS696GN
600X600MM

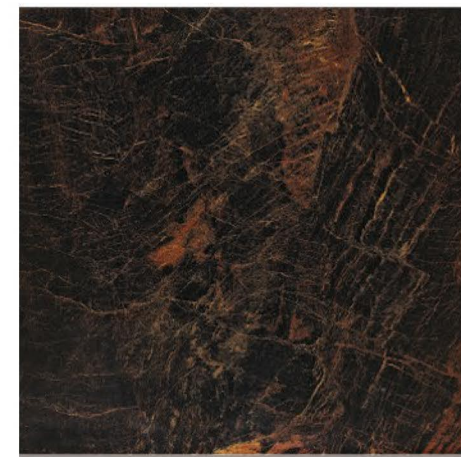

HS675GN HS875GN
600X600MM 800X800MM

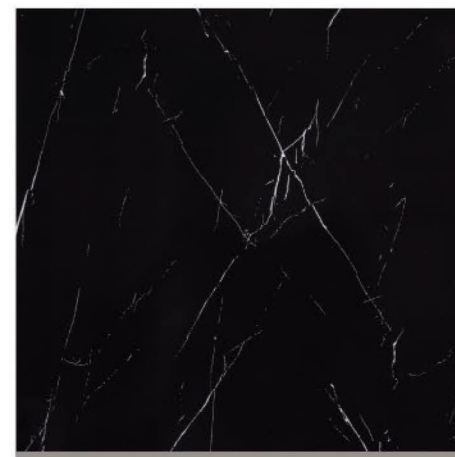

HS641GN HS841GN
600X600MM 800X800MM



HS629GN HS829GN
600X600MM 800X800MM



HS610GN HS810GN
600X600MM 800X800MM



HYH6046PA



HW6901
600X600MM




HW6902
600X600MM



HRL8802
600X600MM



HYH6046PA
600X600MM

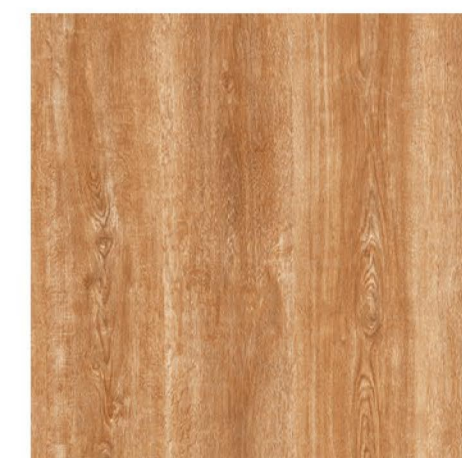

HYH6042PB
800X800MM




HYH6047PC
600X600MM



HW6905
600X600MM



HS674GN
600X600MM

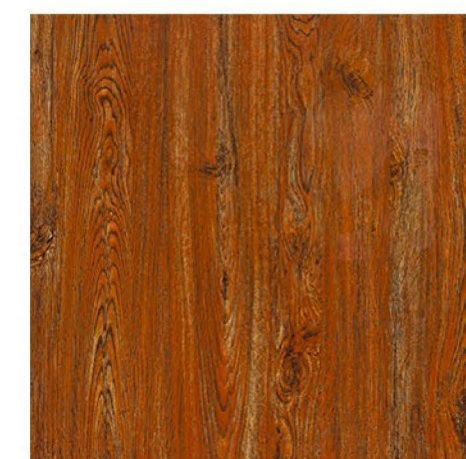

HS635GN
600X600MM



HM8908
800X800MM



HRL8901
800X800MM



HS638GN
600X600MM



HYH6041PA
600X600MM



HYH6187PA
600X600MM



HW6745
600X600MM



HYH6185PA
600X600MM



HYH6186PA
600X600MM



HYH6188PB
600X600MM

Factory view



Packing and loading container



铺贴与指引 Paving Instruction

抛光砖铺贴方法

一、铺贴前的准备工作

- 1、首先选择有资质的熟练施工队，并把施工要求向施工方详细解释，以免由于施工的问题影响铺贴效果。
- 2、按设计要求、根据瓷砖编号、花色图案铺贴、如无规则图案的产品应根据砖底箭头方向铺贴。
- 3、产品若有任何不良状况请立刻通知本公司处理，一经铺贴，恕难负责。

Preparation Before Construction

- 1、Select qualified and skillful construction team and explain the requirements,in details to avoid destroying the effect as a result of wrong construction.
- 2、Follow the requirements of the design,construct the tiles according to the item NO.,patterns and varieties,construct the irregular tiles according to arrow direction on the back of the tiles.
- 3、Please immediately notify our company in case there's any defection to the products .We undertake no responsibilities after Construction.

二、施工时应符合以下规定

- 1、采用325#普通硅酸盐水泥干铺，水泥沙的体积比取：1：4-1：6之间，混合过程中水泥沙要拌均匀，结层厚度为20mm-35mm。
- 2、结合层与瓷砖应平整，用细鱼线打十字线找准水平。
- 3、铺贴时瓷砖的表面应保持洁净、平整、镶嵌正确，在调整砖面时用的橡胶必须用布包裹，防止橡胶沾在砖面：在用槌敲击砖时须120X400X12mm的干净木板隔开，避免槌直接撞击砖面而产生断裂或破损，铺贴过程中遵循设计要求，当设计未作留缝要求时，一般拼缝宽度应控制在2-3mm为佳。
- 4、瓷砖面层铺设后，其砖表面应加以保护，待结合层的水泥砂浆强度达到要求后方可用滑石粉除蜡进行表面清洁，清洁时最好选择专业的保洁队，在除蜡后用干净的棉布清理地面的粉尘，（切忌用湿润布拖擦砖面，避免污垢和水粘在砖表面难以清洗），然后再打蜡，建议每月保养打蜡一次，以保持产品的光泽度。

The Construction Shall Meet the Following Regulations

- 1、Apply325# ordinary portland cement for dry construction, the proportion of cement and sands shall range 1:4-1:6,completely mix the above material to form a layer in thickness ranging 20mm-35mm.
- 2、The connective layer and tilles shall be even,level the with crossing lines.
- 3、The srufacfe of the liles shall be clean and even,correctly construct the tiles,cover the rubbe hammer with fabric when adjusting the tiles, otherwise,the rubber may possibly adhere on the tiles; Isolate the tiles and hammer with 120X400X12mm clean wooden board when knocking,do not directly knock the tiles with hammer,otherwise the tiles may crack or break,Follow the requirements of design,if the design doesn't require to remain gap,it is recommended to control the gaps with 2-3mm.
- 4、After construction,the surface of the tiles shall be well protected, clean the surface with talcum powder after the strength of the cement mortar reaches the requirement,it is better to ask professional to cleaning workers to clean the tiles,after removing the wax on the tiles,please clean the dust on the floor with clean cotton cloth.(do not wipe the tiles with cloth,otherwise,the dirt may remain on the tiles),then polish the tiles,It is suggested to polish the tiles once every month thus remaining the glossiness of the products.

污垢类型 TYPE OF STAIN	清洁剂 CLEANINGAGENT
日常清洁 Daily cleaning	洗洁精、肥皂水 Detergent,soap water
茶水、咖啡、冰淇淋、油脂、啤酒 tea,coffee,ice cream,grease,beer	纯碱溶液 Pure alkali solution
沉淀物、铁锈、灰浆 Sediment,iron rust,plaster	硫酸或盐酸溶液 Sulphuric acid or hydrochloric acid solution
油漆、绘图笔 paint,drawing pen	松节水、丙酮 Turpentine,acetone
酱油、醋、碳末 Sauce,vinegar,charcoal ash	酸或碱溶液 Acid or alkali solution
墨水 Ink	草酸 Ethanedioic acid
泥水 Mud water	亚麻子油 Linolenic acid

高度安全健康建材

耐污染 经1200摄氏度以上高温煅烧及特殊处理，使产品结构细密，吸水率低，砖面毛孔小，污渍难以渗入。

防静电 产品有去除静电作用，适用于任何有防静电要求场所的地墙装饰。

低辐射 坯体材料不含放射性氧气，经国家建材测试中心检测，符合GB6566-2001标准并达到A类要求，其使用不受限制、属绿色建材产品。

高耐磨 坯体经数千吨压机压制，再高温长时间烧炼，使产品硬度超过天然石材，而且防火耐酸碱。

High Degree Safety And Healthconstructional Materials

pollution resistance-After the high tmperature calcinafions of 1200℃,the product has low water absorptiom and the pores of the surface are extemely small preventing the stains from penetrating.

Anti-electrostatics-The product has the anti-electostatics function and is applicable to the wall and floor decorations where anti electrostaticsus required.

Rpdiation-free-The body does not contain radioactive radon,and according to the test done by the national construction mateial testing center, the product does not contain the radioactive element.

High grinding durability The body has been pressed under thousands of tons,and has also been calcined under high temperatyre,durability surpasses natural stones,ang also with functions of fire-proofing and resistance to and alkali.

抛光砖技术标准 Technical Standard

	产品执行标准 THE PRODUCT CARRY OUTS THE STANDARD	标准要求 STANDARD REQUEST	欧洲标准 EUROPEANSTANDARD	HANSE 翰斯
 吸水率 Water absorption	GB/T4100.1-1999	≤0.5%	≤0.5%	≤0.1%
 破坏强度 Breaking strength 断裂模数 Rupture modulus	GB/T4100.1-1999	≥1300N ≥35MPa	≥27MPa	≥1800N ≥38MPa
 长度 Length	GB/T4100.1-1999	±1.0mm	±0.6%	±0.1%
 宽度 Width	GB/T4100.1-1999	±1.0mm	±0.6%	±0.1%
 厚度 Thickness	GB/T4100.1-1999	±5.0mm	±5%	±3%
 表面平整度 Surface roughness	GB/T4100.1-1999	±0.2%	±0.5%	±0.15%
 边直度 Edge straightness	GB/T4100.1-1999	±0.2%	±0.5%	±0.15%
 直角度 Straight angle	GB/T4100.1-1999	±0.2%	±0.6%	±0.15%
 耐磨度 Wearing strength	GB/T4100.1-1999	≤175mm ³	<205mm ³	≤160mm ³
 线性热膨胀系数 Linear thermal expansion coefficient	GB/T4100.1-1999		<9*10 ⁻⁶ K ⁻¹	<7*10 ⁻⁶ K ⁻¹
 热振性 Thermal vibratily	GB/T4100.1-1999	经120℃急冷急热循环5次无裂纹 No cracking and crack after rapid cooling and heating cycle for 12 times	认可	经120℃急冷急热循环5次无裂纹 No cracking and crack after rapid cooling and heating cycle for 12 times. The test is passed
 抗冻性 Frost resisting property	GB/T4100.1-1999	经抗冻性试验后无开裂 无剥落 No crack or spalling after frost resistance test	同EN176	经抗冻性试验后无开裂 无剥落 No crack or spalling after frost resistance test, the test is passed
 光泽度 Glossiness	GB/T4100.1-1999	≥55		>60
 放射性 Radioactivity	GB6566-2001.A类 GB6566-2001.A category	LRa≤1Ir≤1.3		LRa≤0.4Ir≤0.8